


Kanlux

A construction worker wearing a brown beanie and grey overalls is operating a circular saw in a workshop. The worker is focused on the task, looking down at the blade. A bright, warm light source is visible on the left, creating a strong glow and casting shadows. The background shows wooden structures and a dark wall. The overall tone is industrial and professional.


Oprawy liniowe
Kanlux
NOBEN CCT

Kanlux


Kanlux NOBEN CCT




**OCHRONA PRZED
WNIKANIEM WILGOCI
I CIAŁ STAŁYCH IP54**




**AKCESORIA
MONTAŻOWE**



**MATERIAŁ
KŁOSZA
I OBUDOWY: PC**



**SZYBKOZŁĄCZKA
PRZYSPIESZAJĄCA
I UŁATWIAJĄCA
INSTALACJĘ**

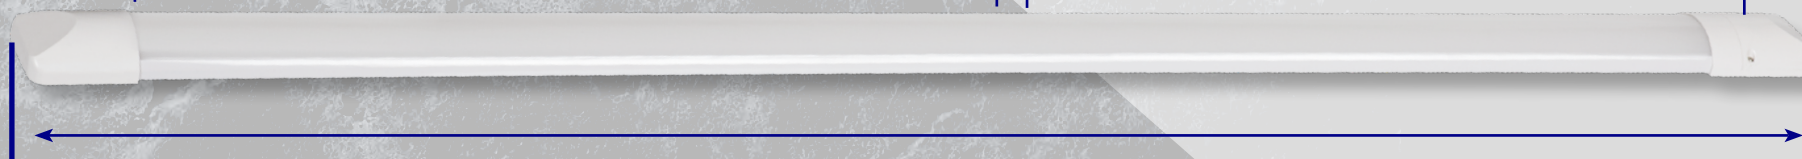

**DWIE DŁUGOŚCI DO WYBORU:
1200mm i 1500mm**

3 LATA GWARANCJI NA WARUNKACH OŚWIADCZENIA GWARANCYJNEGO
DOSTĘPNEGO NA STRONIE INTERNETOWEJ

Kanlux

Kanlux NOBEN CCT

CCT



3000K
4000K
6500K

możliwość
wyboru
temperatury
barwowej



możliwość regulacji
mocy (Power Switch)
w zakresie:

24W / 30W / 36W
dla wersji 120cm

26W / 34W / 42W
dla wersji 150cm

4000K

3000K

6500K



Kanlux



Zastosowanie:

warsztaty, pracownie serwisowe, pomieszczenia gospodarcze, korytarze, komórki lokatorskie, lokale usługowe.

Kanlux

Kanlux NOBEN CCT



Napięcie znamionowe [V]: 220-240 AC

Częstotliwość znamionowa [Hz]: 50

Klasa ochronności przed porażeniem elektrycznym: II

Materiał: PC

Klasa szczelności: IP 54

Trwałość [h]: 30000


Ilość cykli wł/wył: ≥30000

		MOC	STRUMIEŃ ŚWIETLNY	TEMPERATURA BARWOWA
39500	NOBEN M36W-120-CCT	24-30-36W	max 3620/4030/3700lm	3000/ 4000/ 6500K
39501	NOBEN M42W-150-CCT	26-34-42W	max 4140/4670/4260lm	


NOBEN M36W-120-CCT	24W	30W	36W
WW	2740lm	3100lm	3620lm
NW	2970lm	3400lm	4030lm
CW	2800lm	3120lm	3700lm

NOBEN M42W-150-CCT	26W	34W	42W
WW	2940lm	3660lm	4140lm
NW	3200lm	4060lm	4670lm
CW	3000lm	3730lm	4260lm

NOBEN M36W-120-CCT

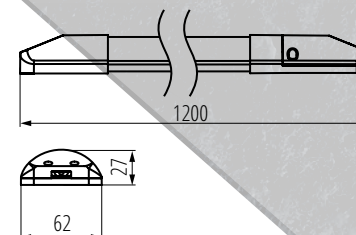

NOBEN M42W-150-CCT

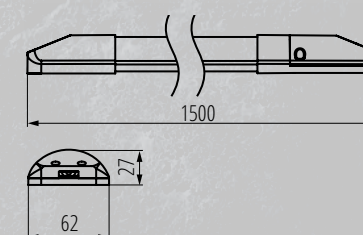

kanlux.com