

Kanlux



**DIGITAL
LED STRIPS**

**Kanlux
LCOB DIGITAL**

Kanlux


Kanlux LCOB DIGITAL

LCOB DIGITAL tapes allow you to create dynamic light animations, impressive light wave transitions or gradients.

- ✓ Full control over individual sections of the strip (SPI communication) allows you to adjust the speed and direction of the LEDs, as well as adjust the brightness and color change speed.
- ✓ COB technology ensures uniform light along the entire length, without visible light spots.



* 3 YEAR WARRANTY UNDER THE TERMS OF THE WARRANTY STATEMENT AVAILABLE ON THE WEBSITE

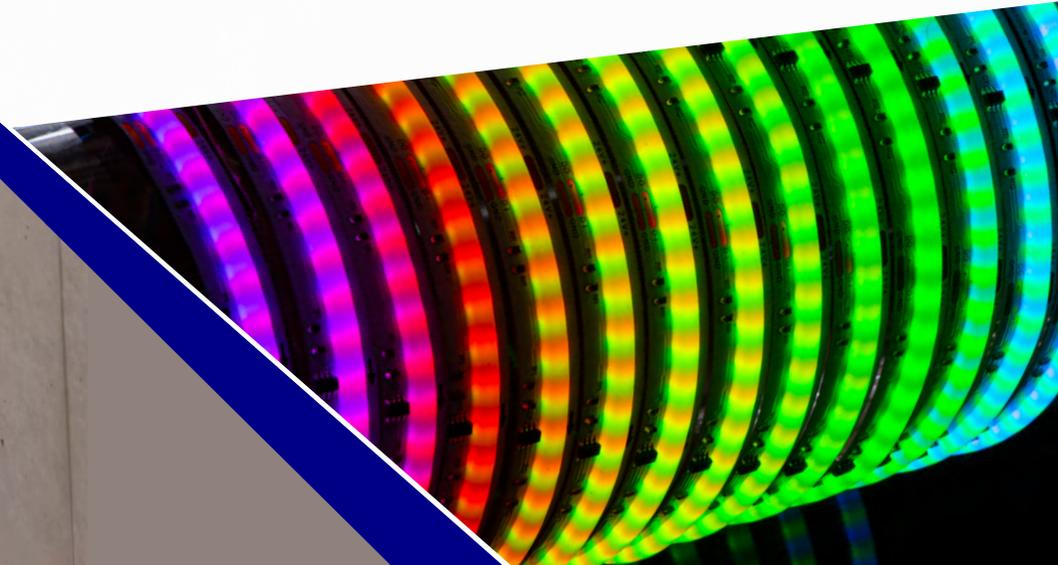

Kanlux

Kanlux LCOB DIGITAL

A perfect solution for modern interior design, multimedia installations, and decorative lighting. Design freedom and reliable performance in demanding projects.




Kanlux

Kanlux LCOB DIGITAL MONO



- ✓ True color reproduction thanks to the high color rendering index (Ra≥90)
- ✓ three colors:
WW (3000K), NW (4000K), CW (6500K)
- ✓ IP00 and IP65
- ✓ length: 5m
- ✓ **420 LED/1m**

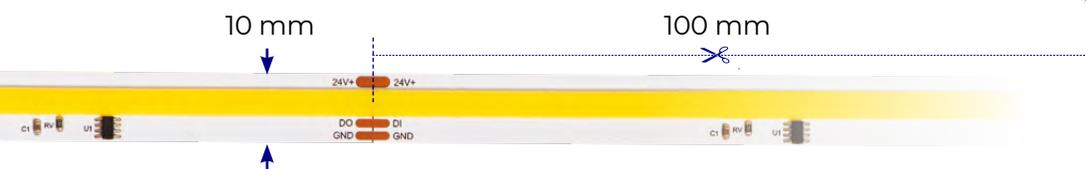


Kanlux



Kanlux LCOB DIGITAL RGB



- ✓ Freedom to create dynamic effects, animations, and smooth color transitions from the full RGB color palette
- ✓ Individual control of strip segments using SPI technology
- ✓ IP00 and IP65
- ✓ length: 5m
- ✓ **576 LED/1m**

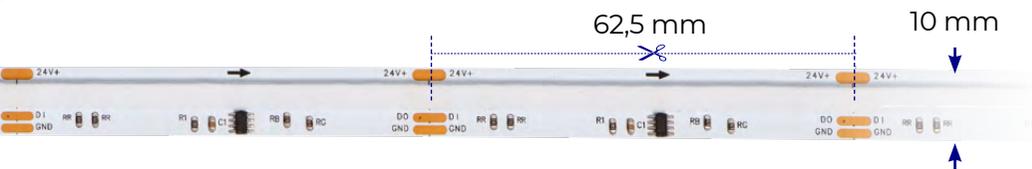

Kanlux

Kanlux LCOB DIGITAL - DIGITAL TAPES ACCESSORIES



- ✓ allow you to freely change the color, pace and direction of the animation, length of luminous sections (LED segments)
- ✓ allow you to save eight of your own dynamic scenes

CONTROLLER

22149

CTRLD 12/24 M/RGB/CCT

CURRENT [A]: max 10

VOLTAGE [V]: 5-24 DC



REMOTE CONTROL

22133

REMOTE D M/RGB/CCT-B

Remote control: RF 2.4GHz Range:
max 30m

Battery powered: 2 x 1.5V (2 x AAA)


Dimensions: 45 x 140 mm

Electric shock protection class: III

Material: plastic

Equipped with a magnetic holder

*batteries not included




CON P CCT/D connectors for LCOB 12V and 24V digital LED strips; width: 10 mm; max 2A.

- ✓ Quick and easy connection of the strips using a clamp, no soldering required.
- ✓ The transparent material ensures a uniform line of light without creating shadows along the strip connection line.
- ✓ 10 pieces per pack


CON P 10 CCT/D



CON P 10 CCT/D CP



CON P 10 CCT/D CPC





		POWER [W]	LUMINOUS FLUX [LM]/1M	COLOUR TEMPERATURE [K]	LEDs LED/1m	IP	CUT [mm]	WIDTH [mm]	CLASS EEI	[M]
39785	LCOB D 11W/M24IP00-WW		1100 lm/m	3000K	420	00	100 mm	10 mm	F	5m
39786	LCOB D 11W/M24IP00-NW		1150 lm/m	4000K	420	00	100 mm	10 mm	F	
39787	LCOB D 11W/M24IP00-CW	11W/m	1150 lm/m	6500K	420	00	100 mm	10 mm	F	
39789	LCOB D 11W/M24IP65-WW		1050 lm/m	3000K	420	65	100 mm	10 mm	F	
39790	LCOB D 11W/M24IP65-NW		1100 lm/m	4000K	420	65	100 mm	10 mm	F	
39791	LCOB D 11W/M24IP65-CW		1100 lm/m	6500K	420	65	100 mm	10 mm	F	
39788	LCOB D 16W/M24IP00RGB	16W/m	390 lm/m	RGB	576	00	62,5 mm	10 mm	-	
39792	LCOB D 16W/M24IP65RGB		380 lm/m	RGB	576	65	62,5 mm	10 mm	-	

39526	CON P 10 CCT/D	
39527	CON P 10 CCT/D CP	CONNECTROS
39528	CON P 10 CCT/D CPC	

22149	CTRLD 12/24 M/RGB/CCT	CONTROLLER
--------------	-----------------------	-------------------

22133	REMOTE D M/RGB/CCT-B	REMOTE CONTROLL
--------------	----------------------	------------------------

* 3 YEAR WARRANTY UNDER THE TERMS OF THE WARRANTY STATEMENT AVAILABLE ON THE WEBSITE

**well
packed**

